

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 21 TOWNSHIP 16 RANGE 3

DATE: 9-25-06

PARTY CHIEF: Kiste

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 7-6-99

IN. S.P.C. E ZONE NAD '83

NAME: 16032104

N: 507344.2303(m)

E: 52947.5860(m)

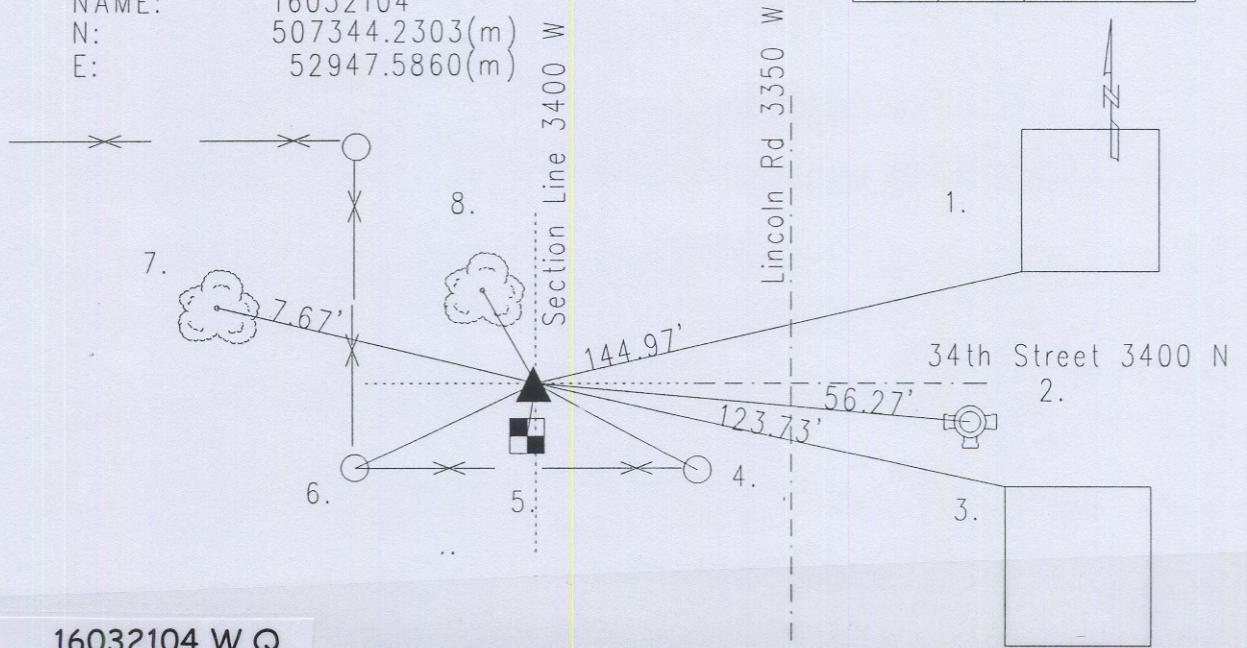

16032104 W Q

**CORNER HISTORY:** Corner originally set in 1820 as a post by Wm. B. Laughlin with witness: 10" beech bearing S 76 E 7 links; 30" sugar bearing S 65 W 7 links per Marion County Atlas pg. 7. This corner was established by monumentation found in the following areas: 1: Highwood sub plat Book 28, page 340. 2: Highwood sub plat Book 28, page 254. 3: Legal survey of Williamsburg West Phase II by Schneider Engineering found in Wayne Township Legal Survey Book pg. 63. 4: arbitrary maps of 20-16-3 & 21-16-3 ; 5: A survey of Ethel's Acres by Henry Best L.S. Reference dated 3-11-94 by Wilcoxon excavated the 36" capped rebar and set a #205 Harrison cast iron monument in position of the rebar.

16032104

REF.	DISTANCE	DESCRIPTION
1.	144.97'	Sw corner of foundation one story ADDRESS 3344
2.	56.27'	Top nut of fire hydrant
3.	123.73'	NW corner of brick one story ADDRESS 3385
4.	9.10'	Face of steel corner fence post
5.	3.20'	Face MCSO sign post
6.	7.50'	Face of steel corner fence post
7.	7.67'	Railroad spike NF 18' hackberry 12" up
8.	1.49'	Mag nail w/washer SW 36" hackberry 8" up